
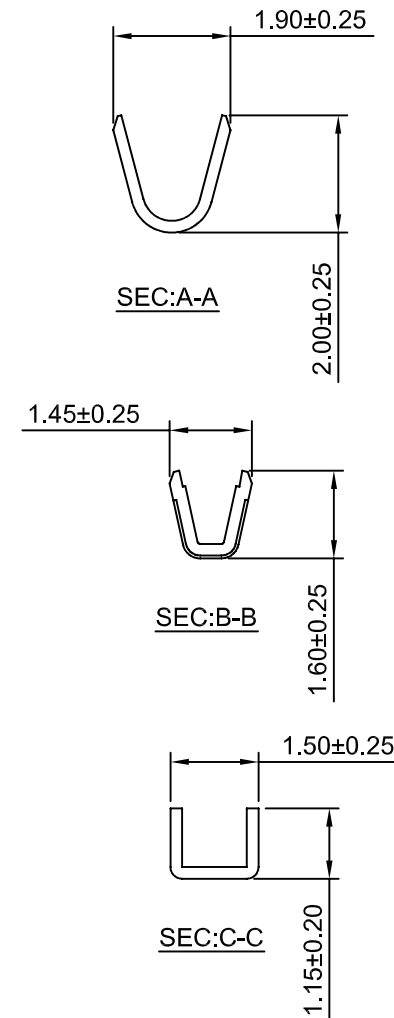
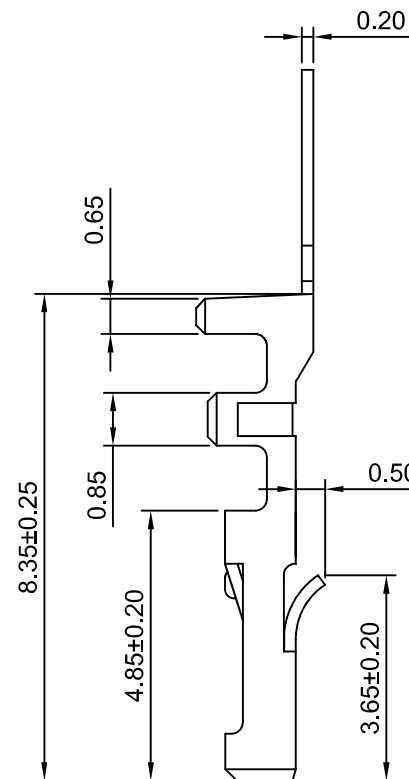


修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW RELEASE	WANG	2012-12-10

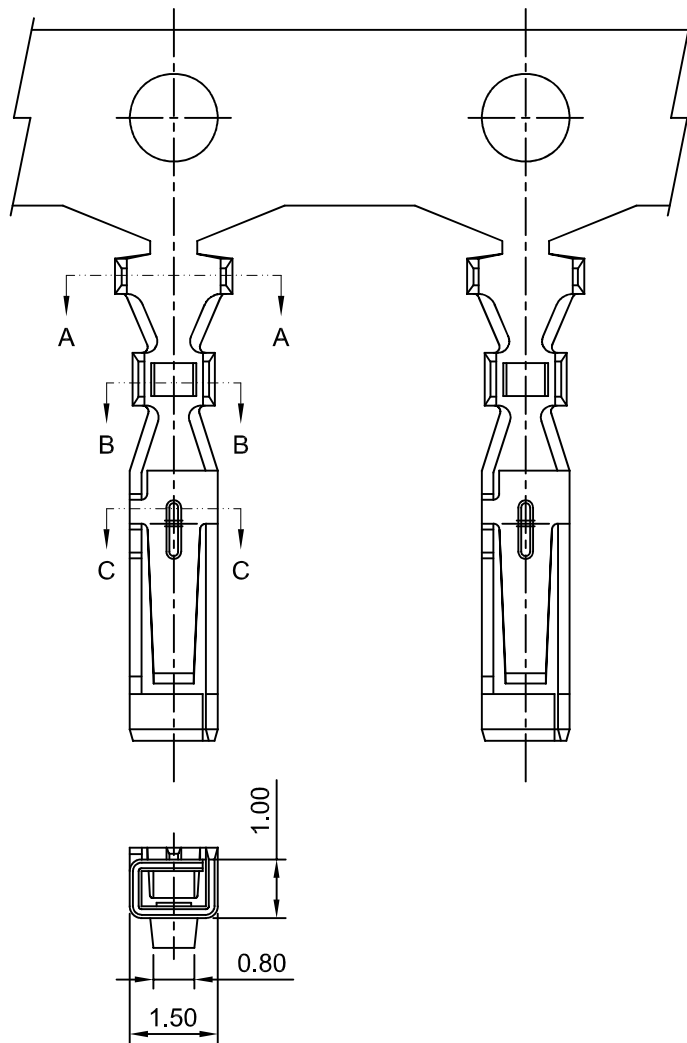


Ordering information & Specifications




Unit:mm

Part No	Wire Range	Insultion O.D.	Material	Finish	Qty/reel
HDGC2003F-TP	AWG#24-#28	1.15mm(max)	Phosphor Bronze	Tin over Nickel	10,000 PCS
HDGC2003F-GP	AWG#24-#28	1.15mm(max)	Phosphor Bronze	Gold over Nickel	10,000 PCS


Optional Gold plating available but MOQ requested

		深圳市华德共创科技有限公司 Shenzhen Huade co-create Technology Co.,LTD TEL : 0755-27129737 FAX : 0755-29940187								
-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表					TITLE: 2.00mm Pitch 产品名称: Crimp Terminal					
X.X	±0.30	X.X°	±3°	APPD: 核准:	XIE		PART NO: 产品编号:		HDGC2003F-T	
X.XX	±0.30	X.XX°	±2°	CHECK: 校对:	WANG		DATE	SCALE	UNIT	CODE NUMBER
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图:	WANG		2012-12-10	8:1	mm	A008


修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW RELEASE	WANG	2012-12-10

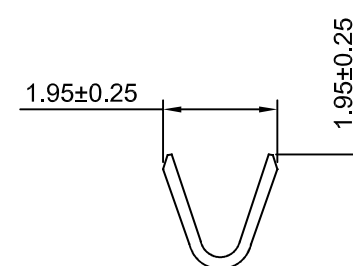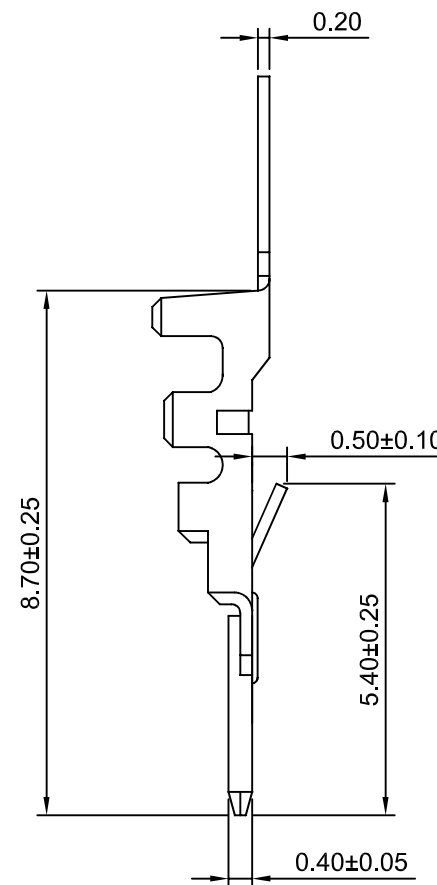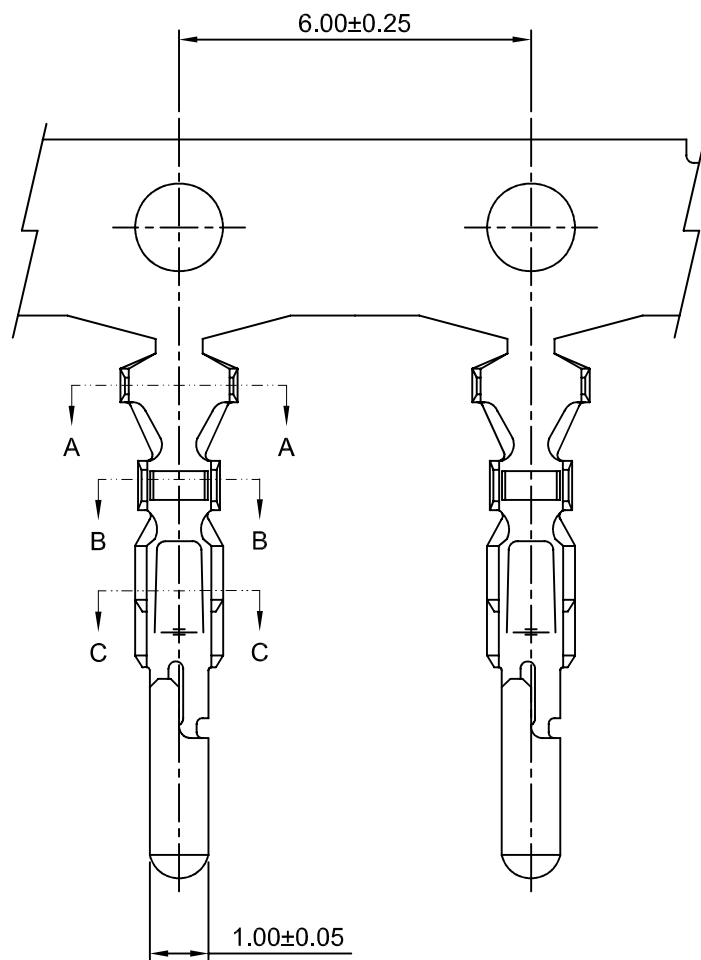

SEC:A-A



SEC:B-B



SEC:C-C

Ordering information & Specifications

Unit:mm

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
HDGC2003M-TP	AWG#24-#28	1.15mm(max)	Phosphor Bronze	Tin over Nickel	10,000 PCS
HDGC2003M-GP	AWG#24-#28	1.15mm(max)	Phosphor Bronze	Gold over Nickel	10,000 PCS

Optional Gold plating available but MOQ requested



深圳市华德共创科技有限公司




Shenzhen Huade co-create Technology Co.,LTD

TEL : 0755-27129737


FAX : 0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表				TITLE: 产品名称: 2.00mm Pitch Crimp Terminal	
X.X	±0.30	X.X°	±3°	APPD: 核准: XIE	PART NO: 产品编号: HDGC2003M-T
X.XX	±0.30	X.XX°	±2°	CHECK: 校对: WANG	DATE
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图: WANG	SCALE
					UNIT
					CODE NUMBER
					A008


修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW RELEASE	WANG	2012-12-10

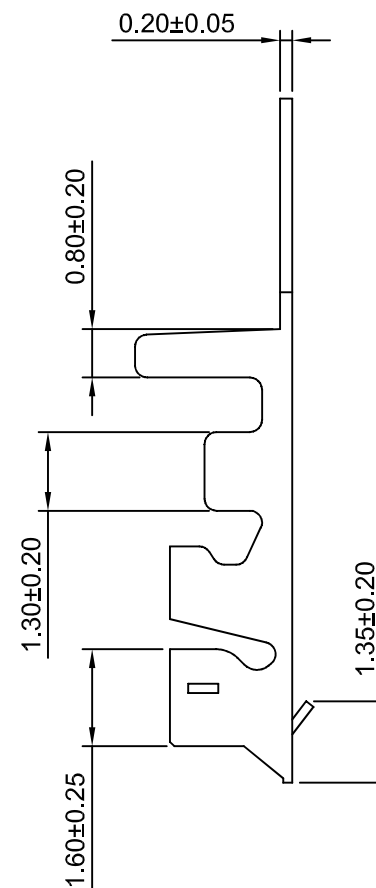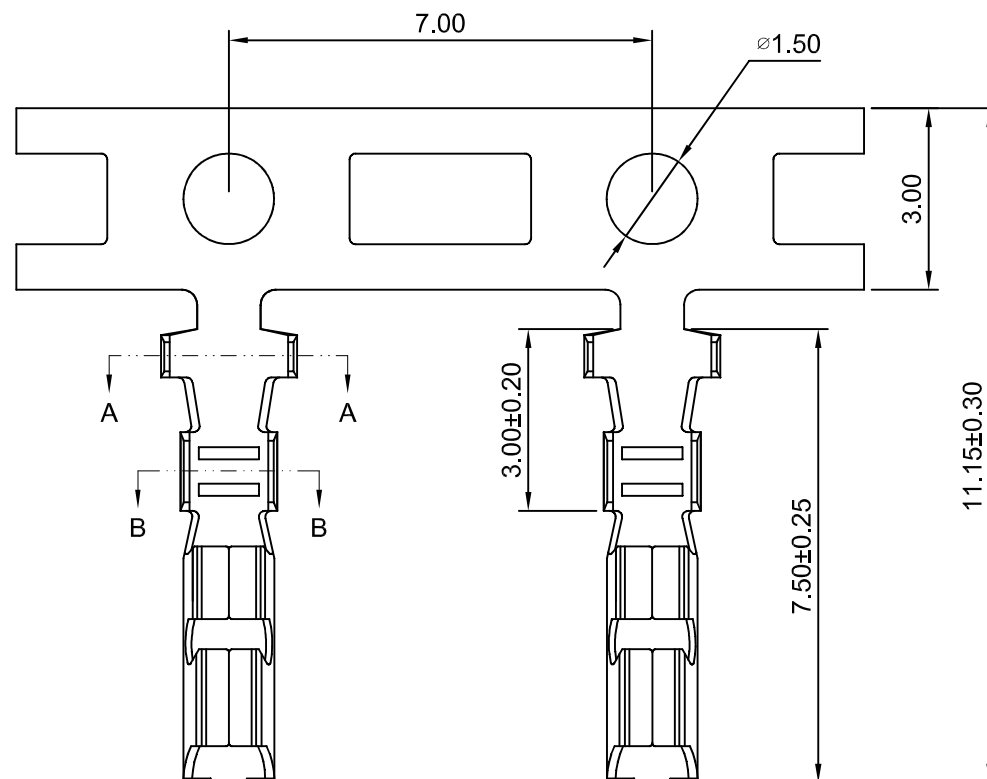

SEC:A-A

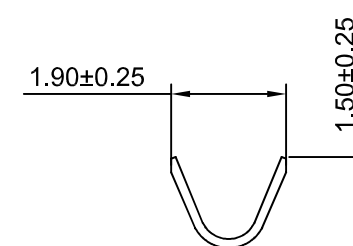

SEC:B-B



Ordering information & Specifications

Unit:mm

Part No	Wire Range	Insultion O.D.	Material	Finish	Qty/reel
HDGC2003FB-TP	AWG#22-#26	1.50mm(max)	Phosphor Bronze	Tin over Nickel	8,000 PCS
HDGC2003FB-GP	AWG#22-#26	1.50mm(max)	Phosphor Bronze	Gold over Nickel	8,000 PCS






深圳市华德共创科技有限公司

Shenzhen Huade co-create Technology Co.,LTD


TEL : 0755-27129737 FAX : 0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表				TITLE: 产品名称: 2.00mm Pitch Crimp Terminal			
X.X	±0.30	X.X°	±3°	APPD: 核准:	XIE		
X.XX	±0.30	X.XX°	±2°	CHECK: 校对:	WANG		
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图:	WANG		
				DATE	SCALE	UNIT	CODE NUMBER
				2012-12-10	8:1	mm	A008


修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW RELEASE	WANG	2012-12-10

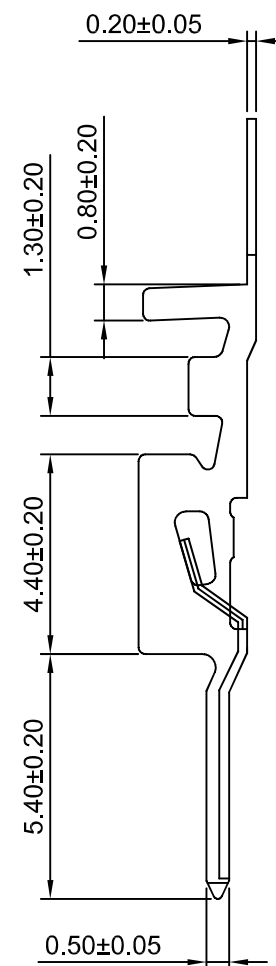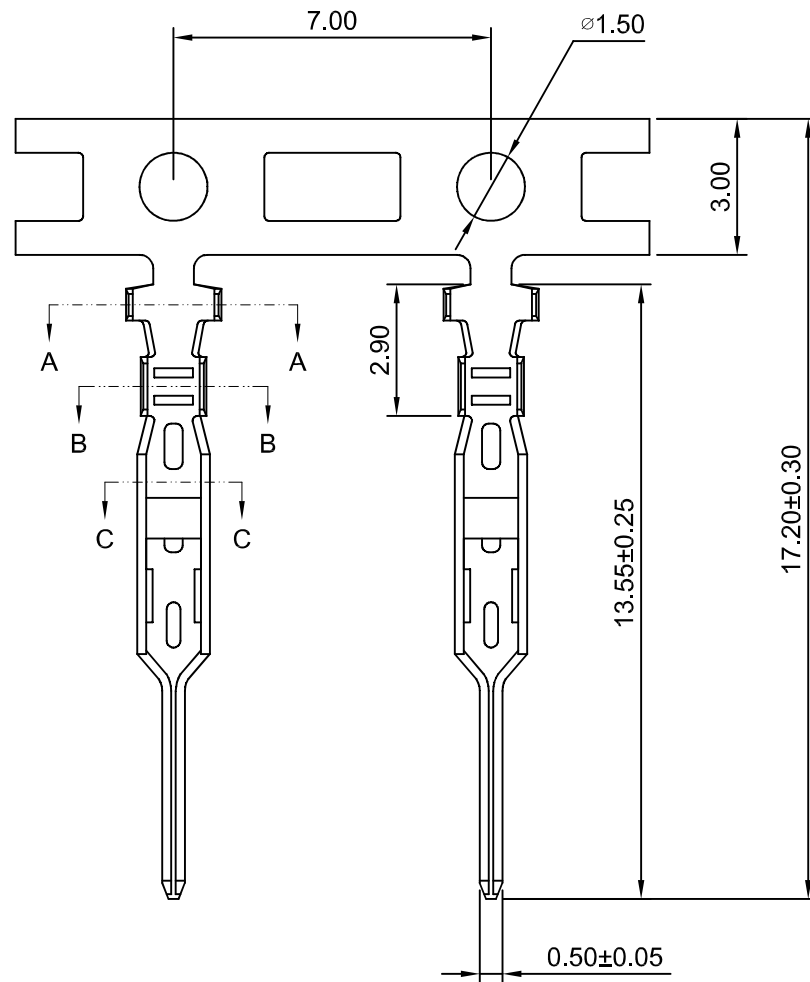

SEC:A-A



SEC:B-B

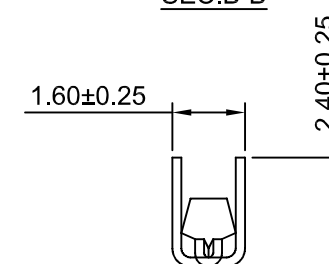

SEC:C-C

Ordering information & Specifications

Unit:mm

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
HDGC2003MB-TP	AWG#22-#26	1.50mm(max)	Phosphor Bronze	Tin over Nickel	10,000 PCS
HDGC2003MB-GP	AWG#22-#26	1.50mm(max)	Phosphor Bronze	Gold over Nickel	10,000 PCS



深圳市华德共创科技有限公司





Shenzhen Huade co-create Technology Co.,LTD

TEL : 0755-27129737

FAX : 0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表				TITLE: 产品名称: 2.00mm Pitch Crimp Terminal	
X.X	±0.30	X.X°	±3°	APPD: 核准: XIE	PART NO: 产品编号: HDGC2003MB-T
X.XX	±0.30	X.XX°	±2°	CHECK: 校对: WANG	DATE
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图: WANG	SCALE
					UNIT
					CODE NUMBER
					A008

修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW RELEASE	WANG	2012-12-10

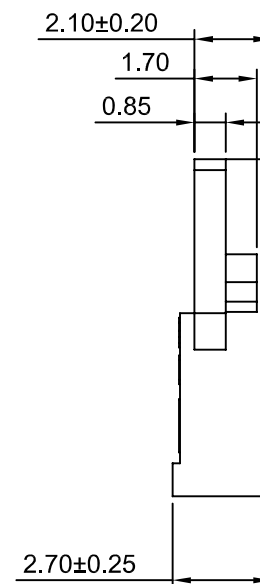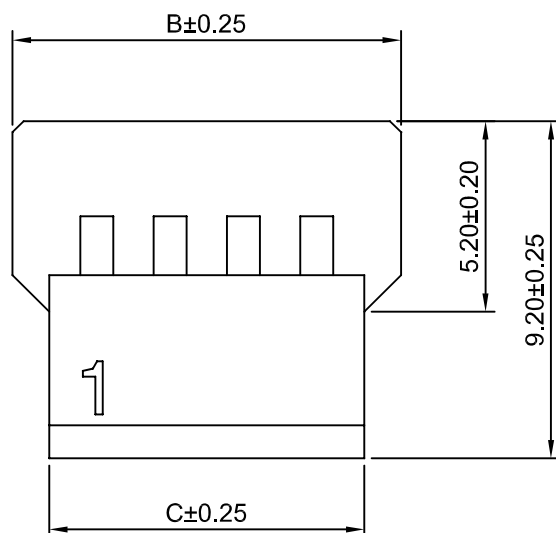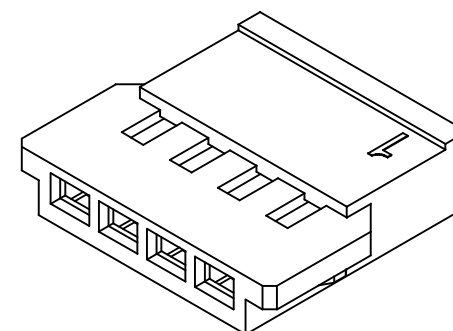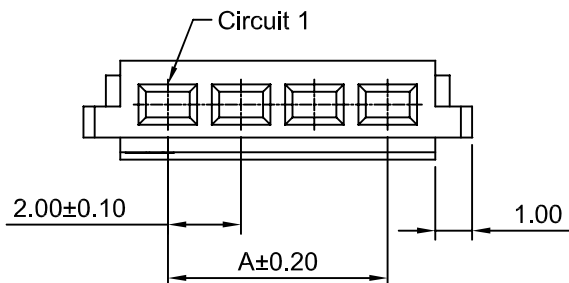

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2P	2.00	6.60	4.60	8P	14.00	18.60	16.60
3P	4.00	8.60	6.60	9P	16.00	20.60	18.60
4P	6.00	10.60	8.60	10P	18.00	22.60	20.60
5P	8.00	12.60	10.60	11P	20.00	24.60	22.60
6P	10.00	14.60	12.60	12P	22.00	26.60	24.60
7P	12.00	16.60	14.60	13P	24.00	28.60	26.60

SPECIFICATIONS:

Current Rating: 2A AC,DC

Voltage Rating: 125V AC,DC

Temperature Range: -25°C~+85°C

Contact Resistance: 20mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 500V AC/minute

Material: Nylon 66,UL94V-0(White)







深圳市华德共创科技有限公司

Shenzhen Huade co-create Technology Co.,LTD

TEL : 0755-27129737 FAX : 0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表				TITLE: 产品名称: 2.00mm Pitch Housing			
X.X	±0.30	X.X°	±3°	APPD: 核准:	XIE		
X.XX	±0.30	X.XX°	±2°	CHECK: 校对:	WANG		
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图:	WANG		
				PART NO: 产品编号:	HDGC2003HF-XP		
				DATE	SCALE	UNIT	CODE NUMBER
				2012-12-10	5:1	mm	A008


修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW RELEASE	WANG	2012-12-10

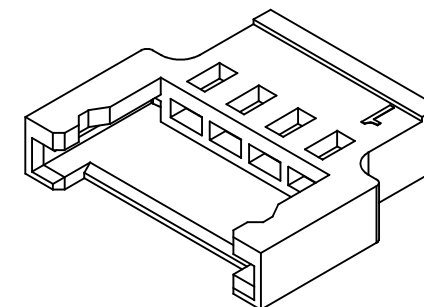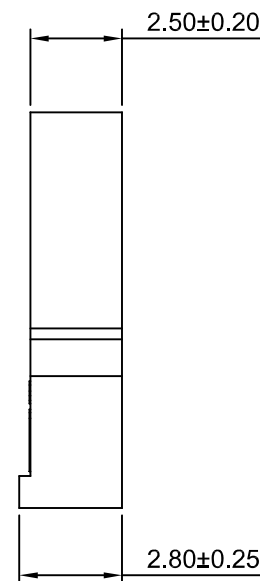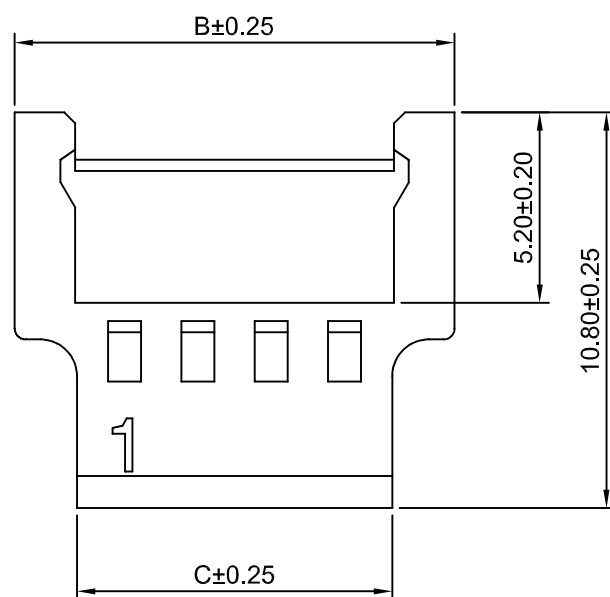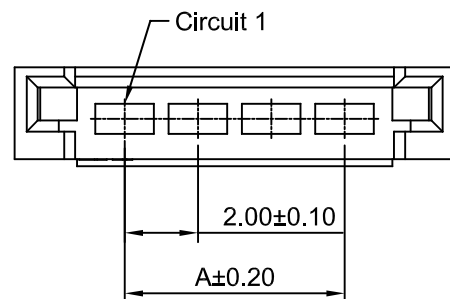









Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2P	2.00	8.00	4.60	8P	14.00	20.00	16.60
3P	4.00	10.00	6.60	9P	16.00	22.00	18.60
4P	6.00	12.00	8.60	10P	18.00	24.00	20.60
5P	8.00	14.00	10.60	11P	20.00	26.00	22.60
6P	10.00	16.00	12.60	12P	22.00	28.00	24.60
7P	12.00	18.00	14.60	13P	24.00	30.00	26.60

SPECIFICATIONS:
Current Rating: 2A AC,DC
Voltage Rating: 125V AC,DC
Temperature Range: -25°C~+85°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 500V AC/minute
Material: Nylon 66,UL94V-0(White)

		深圳市华德共创科技有限公司							
Shenzhen Huade co-create Technology Co.,LTD						TEL : 0755-27129737		FAX : 0755-29940187	
-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表					TITLE: 产品名称：2.00mm Pitch Housing				
X.X	±0.30	X.X°	±3°	APPD: 核准：	XIE				
X.XX	±0.30	X.XX°	±2°	CHECK: 校对：	DATE		SCALE	UNIT	CODE NUMBER
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图：	2012-12-10		5:1	mm	A008

修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW RELEASE	WANG	2012-12-10

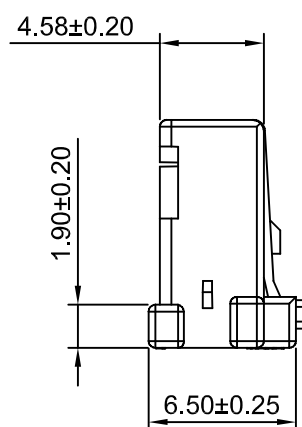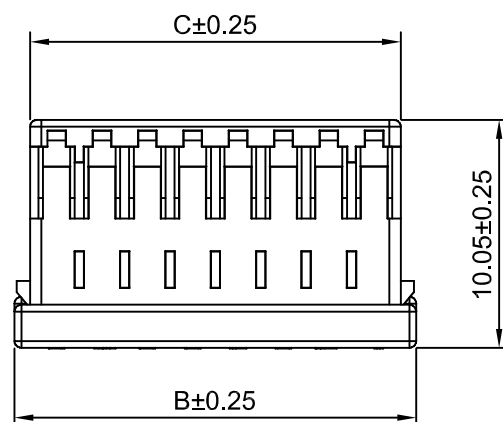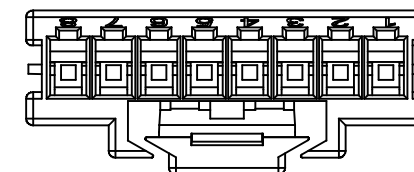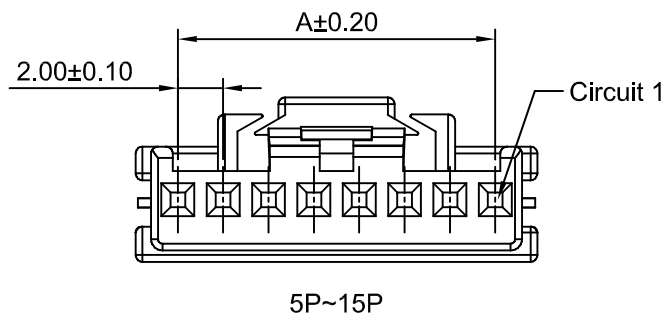

Ordering Information & Dimensions

Circuits	Dimensions(mm)		
	A	B	C
2P	2.00	5.71	4.35
3P	4.00	7.71	6.35
4P	6.00	9.71	8.35
5P	8.00	11.71	10.35
6P	10.00	13.71	12.35
8P	14.00	17.71	16.35
10P	18.00	21.71	20.35
12P	22.00	25.71	24.35
14P	26.00	29.71	28.35
15P	28.00	31.71	30.35

SPECIFICATIONS:

Current Rating: 3A AC,DC (AWG #22)

Voltage Rating: 100V AC,DC

Temperature Range: -25°C~+85°C

Contact Resistance: 15mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 800V AC/minute

Material: PBT, UL94V-0 (White)


深圳市华德共创科技有限公司

Shenzhen Huade co-create Technology Co.,LTD




TEL : 0755-27129737 FAX : 0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表						TITLE: 产品名称: 2.00mm Pitch Housing			
X.X	±0.30	X.X°	±3°	APPD: 核准:	XIE	PART NO: 产品编号: HDGC2003HFB-XP			
X.XX	±0.30	X.XX°	±2°	CHECK: 校对:	WANG	DATE	SCALE	UNIT	CODE NUMBER
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图:	WANG	2012-12-10	3:1	mm	A008

修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW RELEASE	WANG	2012-12-10

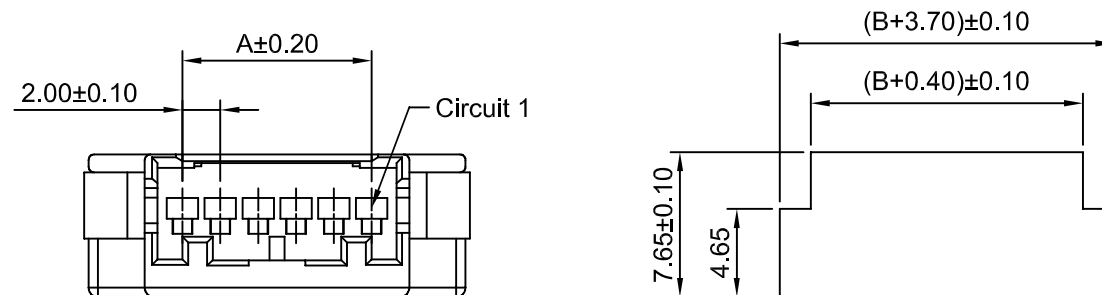

PANEL HOLE LAYOUT
TOLERANCE:±0.05

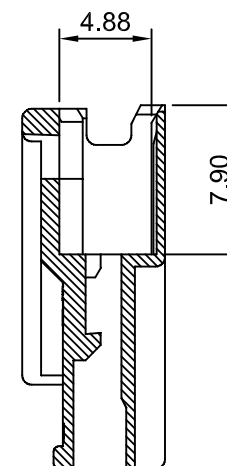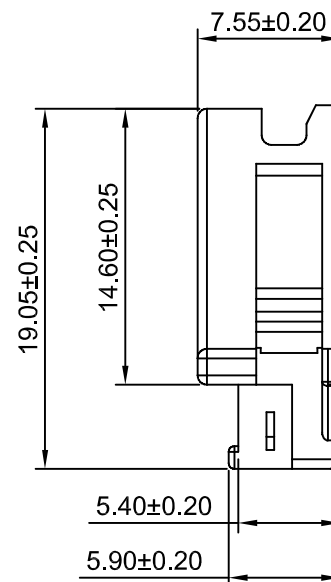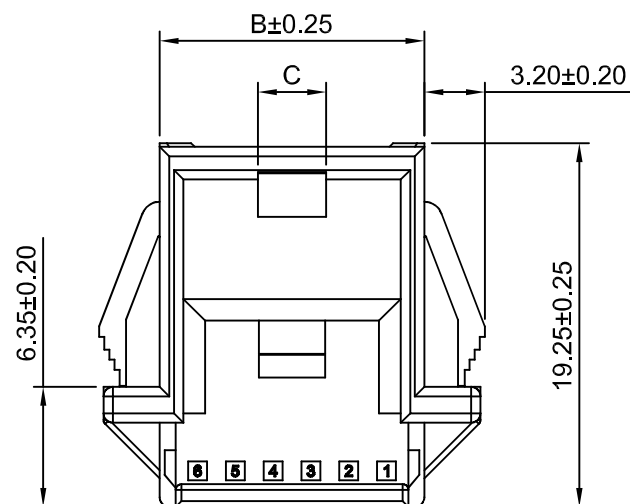

Ordering Information & Dimensions

Circuits	Dimensions(mm)		
	A	B	C
2P	2.00	6.00	1.50
3P	4.00	8.00	2.06
4P	6.00	10.00	3.06
5P	8.00	12.00	3.06
6P	10.00	14.00	3.06
8P	14.00	18.00	3.06
10P	18.00	22.00	3.06
12P	22.00	26.00	3.06
14P	26.00	30.00	3.06
15P	28.00	32.00	3.06

SPECIFICATIONS:

Current Rating: 3A AC,DC (AWG #22)
Voltage Rating: 100V AC,DC
Temperature Range: -25°C~+85°C
Contact Resistance: 15mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 800V AC/minute
Material: Nylon66, UL94V-0 (White)







深圳市华德共创科技有限公司

Shenzhen Huade co-create Technology Co.,LTD

TEL : 0755-27129737 FAX : 0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表				TITLE: 产品名称: 2.00mm Pitch Housing			
X.X	±0.30	X.X°	±3°	APPD: 核准:	XIE	PART NO: 产品编号: HDGC2003HMB-XP	
X.XX	±0.30	X.XX°	±2°	CHECK: 校对:	WANG	DATE	SCALE
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图:	WANG	2012-12-10	UNIT
						2.5:1	CODE NUMBER
						mm	A008

修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW RELEASE	WANG	2012-12-10

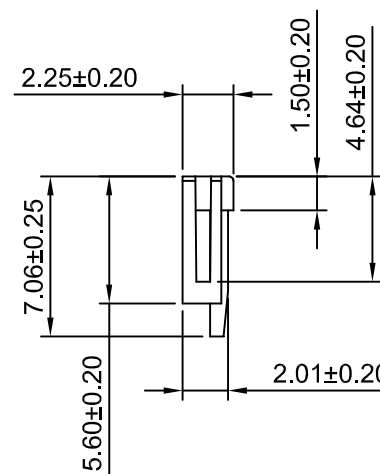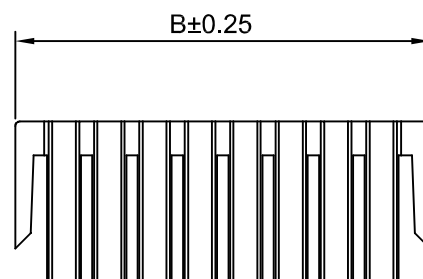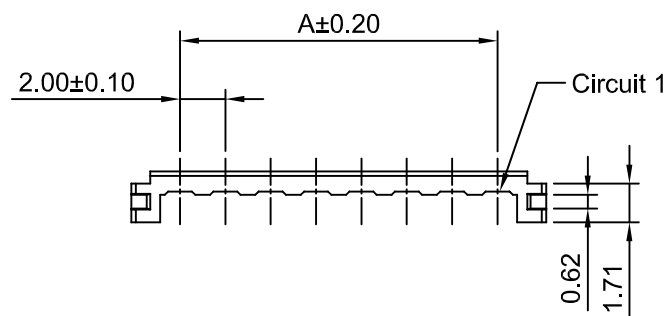

Ordering Information & Dimensions

Circuits	Dimensions(mm)	
	A	B
2P	2.00	6.30
3P	4.00	8.30
4P	6.00	10.30
5P	8.00	12.30
6P	10.00	14.30
8P	14.00	18.30
10P	18.00	22.30
12P	22.00	26.30
14P	26.00	30.30
15P	28.00	32.30

SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 100V AC,DC
Temperature Range: -25°C~+85°C
Contact Resistance: 15mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 800V AC/minute
Material: Nylon66, UL94V-0 (Ivory)



深圳市华德共创科技有限公司

Shenzhen Huade co-create Technology Co.,LTD

TEL : 0755-27129737 FAX : 0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表				TITLE: 产品名称: 2.00mm Pitch Seal	
X.X	±0.30	X.X°	±3°	APPD: 核准:	XIE
X.XX	±0.30	X.XX°	±2°	CHECK: 校对:	WANG
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图:	WANG
				PART NO: 产品编号:	HDGC2003SB-XP
				DATE	SCALE
				UNIT	CODE NUMBER
				2012-12-10	3:1 mm A008